


Specifications

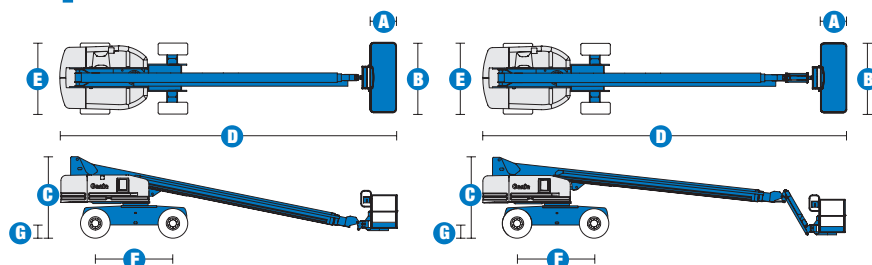

MODELS	S™-80		S™-85	
MEASUREMENTS	Metric	US	Metric	US
Working height max*	26.40 m	86 ft	27.90 m	91 ft
Platform height max	24.40 m	80 ft	25.90 m	85 ft
Horizontal reach max	22.07 m	72 ft 5 in	23.60 m	77 ft 5 in
Below ground reach	3.05 m	10 ft	4.19 m	13 ft 9 in
A Platform length - 6 ft model	76 cm	2 ft 6 in	76 cm	2 ft 6 in
Platform length - 8 ft model	91 cm	3 ft	91 cm	3 ft
B Platform width - 6 ft model	1.83 m	6 ft	1.83 m	6 ft
Platform width - 8 ft model	2.44 m	8 ft	2.44 m	8 ft
C Height - stowed	2.80 m	9 ft 2 in	2.80 m	9 ft 2 in
D Length - stowed	11.35 m	37 ft 3 in	12.37 m	40 ft 7 in
Length - transport (jib tucked under)			10.67 m	35 ft
E Width - axles retracted	2.44 m	8 ft	2.44 m	8 ft
Width - axles extended	3.07 m	10 ft 1 in	3.07 m	10 ft 1 in
F Wheelbase	2.74 m	9 ft	2.74 m	9 ft
G Ground clearance - centre	43 cm	1 ft 5 in	43 cm	1 ft 5 in

PRODUCTIVITY

Lift capacity - 6 ft platform	272 kg	600 lbs	227 kg	500 lbs
Lift capacity - 8 ft platform	227 kg	500 lbs	227 kg	500 lbs
Platform rotation	160°	160°	160°	160°
Turntable rotation	360° continuous	360° continuous	360° continuous	360° continuous
Turntable tailswing - axle retracted	1.42 m	4 ft 8 in	1.42 m	4 ft 8 in
Turntable tailswing - axle extended	1.12 m	3 ft 8 in	1.12 m	3 ft 8 in
Drive speed - stowed	5.6 km/h	3.5 mph	5.6 km/h	3.5 mph
Drive speed - raised/extended	1.1 km/h	0.68 mph	1.1 km/h	0.68 mph
Gradeability** - stowed 2WD	30%	30%	30%	30%
Gradeability** - stowed 4WD	45%	45%	45%	45%
Turning radius - axle extended: inside	3.25 m	10 ft 8 in	3.25 m	10 ft 8 in
outside	7.01 m	23 ft	7.01 m	23 ft
Controls	12 V DC proportional		12 V DC proportional	
Tyres - RT lug	385/65 D22.5		385/65 D22.5	

POWER

Power source	Deutz BF4L 2011 4 cylinder diesel 78 hp (58.1 kW) Perkins 804C-33 4 cylinder diesel 63 hp (50 kW)			
Auxiliary power unit	12 V DC	12 V DC	12 V DC	12 V DC
Hydraulic tank capacity	170 L	45 gal	170 L	45 gal
Fuel tank capacity	125 L	33 gal	125 L	33 gal


WEIGHT***

2WD	15,073 kg	33,230 lbs	16,198 kg	35,710 lbs
4WD	15,141 kg	33,380 lbs	16,266 kg	35,860 lbs


STANDARDS COMPLIANCE

CE EN280, PB-10-611-03

RANGE OF MOTION S™-80

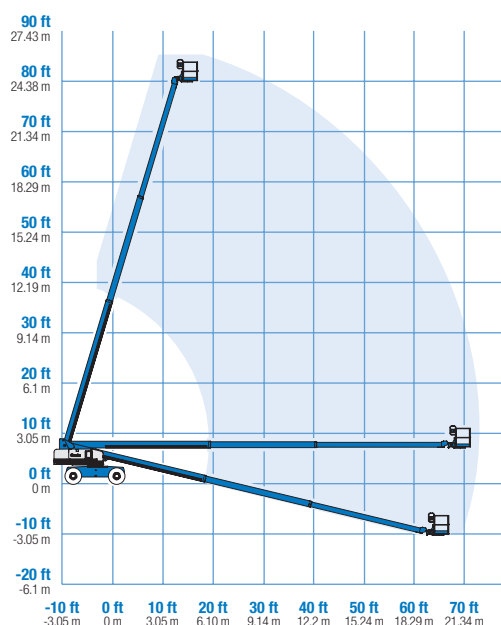

RANGE OF MOTION S™-85

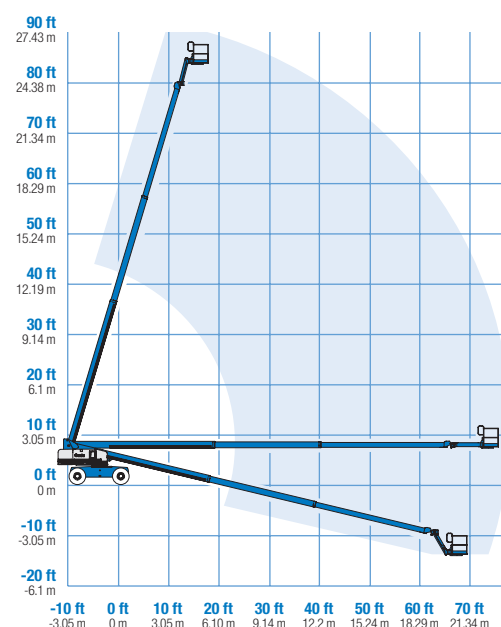

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- Steel 8 ft (2.44 m)
- Steel 6 ft (1.83 m)
- Steel 6** or 8 ft (1.83 or 2.44 m) tri-entry
- Steel 4 ft (1.22 m)**
- Steel 5 ft (1.52 m)**

JIB OPTIONS

- Non-jib
- 5 ft (1.52 m) jib boom

POWER OPTIONS

- Deutz turbocharged diesel 74 hp (55 kW)
- Perkins diesel 63 hp (47 kW)
- Continental Gas/LPG 74 hp (55 kW)

DRIVE OPTIONS

- 2WD
- 4WD

AXLE

- Active oscillation

TIRE OPTIONS

- Rough terrain foam-filled (standard)
- Rough terrain non-marking foam-filled
- High floatation air-filled
(Increases width by 4 in)

STANDARD FEATURES

MEASUREMENTS

S™-80

- 86 ft (26.38 m) working height
- 71 ft 6 in (21.8 m) horizontal reach
- 500 lbs (227 kg) lift capacity

S™-85


- 91 ft (27.90 m) working height
- 76 ft 6 in (23.3 m) horizontal reach
- 500 lb (227 kg) lift capacity

PRODUCTIVITY

- Self-leveling platform
- Hydraulic platform rotation
- Fully proportional Hall effect joystick controls
- Drive enable
- AC power cord to platform
- Horn
- Hour meter
- Tilt alarm
- Descent alarm
- 360° continuous turntable rotation
- Locking low profile turntable covers
- Positive traction drive
- Two speed wheel motors

POWER

- All engines are emissions compliant
- 12V DC auxiliary power
- Anti-restart engine protection
- Auto engine fault shutdown
- Catalytic converter muffler (Continental engine only)
- Engine block heater (Continental engine only)

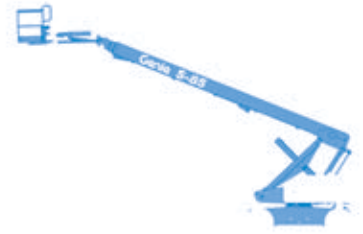

OPTIONS & ACCESSORIES

PRODUCTIVITY

- 750 lb capacity, S-80 only***
- Platform swing gate
- Half mesh platform inserts with swing gate
- Platform top auxiliary rail
- Arc Pro 275™ Heavy-Duty Welder package
- Welder Ready package
- Weld leads to platform
- Air line to platform
- Hydraulic oil cooler
- Fire resistant hydraulic oil
- Biodegradable hydraulic oil
- Basic hostile environment kit
- Deluxe hostile environment kit
- Deluxe aircraft protection package (6 ft platform only)
- Tool tray
- Fluorescent tube caddy
- Pipe cradle (pair)
- Alarm package
- Panel cradle package*
- Platform work lights
- Front driving lights
- Lockable platform control box covers
- Second battery
- Tow package

POWER

- Engine gauge package
- AC generator packages (110V/60Hz, 3000W or 220V/50Hz, 2500W)
- Cold Weather Packages
- Arctic Packages
- Diesel scrubber/spark arrestor muffler
- Diesel spark arrestor muffler
- Retained key selector switch
- LPG tank only, steel, 33.5 lb (15.19 kg) capacity
- Additional LPG tank with carrier

* Available on select models

** Not available on CE machines

*** 750 lb capacity option adds 5,100 lbs (2,313 kg) to weight